

HIGHLIGHTS

NEWS FROM ELKO EP & INELS WORLD



iNELS Wireless wonders	Showcase the latest advancements in our wireless technologies.	4
Matter Marvels	Unveil the magic of our Matter- -compatible devices.	8
Icons configurator	Introduce news-worthy icons configuration.	10
iNELS Bus Breakthroughs	Highlight innovations in our bus systems, creating a connected experience.	19
Apps and Cloud	Explore the latest from our iNELS applications and the cloud.	22
Relay Releations	Spotlight on relays.	













Wall Touch panel with clever functions



The RF Touch-2 wall touch unit is a central element for controlling heating, switching electrical appliances and equipment, dimming lights or controlling blinds and detectors.

It includes a temperature and humidity sensor for the thermostat function. It sends and receives commands from the elements and displays everything on a four--inch capacitive display.

The room temperature can be adjusted using a digital thermoregulator and the device is also able to create cooling circuits. RF Touch-2 allows quick control and creation of scenes that perform the required actions on the set devices. For example, it can simultaneously close blinds and dim lights in the living room.

The touch unit is fully compatible with the iNELS mobile application and can be connected to iNELS CLOUD.

Control DALI by wireless



Ultra-small unit for controlling lights and ballasts with DALI protocol. It comes in two versions: **RFDALI-04B-SL** for 4 DALI addresses and **RFDALI-32B-SL** for 32 addresses.

Powers and automatically scans the DALI bus. Assigning addresses to groups and connecting to wireless controllers or sensors is done via WiFi. RFDALI enables the creation of scenarios with other elements for controlling classic LED lights or blinds. It is possible to add to the control from system units and aps.



External input for button

All the lights on the bus can be controlled with one classic button.

WiFi for easy setup


Assign lights to groups and connect to wireless switches easily via computer or phone.

Part of a iNELS Wireless portfolio



dh

You can connect to any wireless unit, application or cloud.





Glass touch controller with integrated Dimmer allows you to dim LED or even classic lights and control them directly from the touch unit. The buttons on the touch unit can also be used to control other dimmers from the iNELS Wireless portfolio.

Lights can be added to groups and other units can be assigned to them, such as switch units for shutters, dimmable sockets, or other wireless controllers. The number of added units is practically unlimited. Up to 4 scenarios can be controlled from the Glass touch controller.

Glass touch controller with integrated relays is used to control 2 light zones or other appliances. The relays have a ZERO CROSS function, so they are capable of switching even larger LED loads.

The connection with other wireless switches or sensors is very easy, so it is possible to create staircase scenes and automation using sensors, or simply to control the built-in relays from several places at the same time.









White glass sharp edges RFSW-62/W









Black glass round edges RFSW-262/B



White glass round edges RFSW-262/W

👬 matter

Our Matter products portfolio


It does Matter

inels

Matter is a new standard for home automation, which connects Smart Home units with devices from manufacturers of popular technology, i.e. their applications and control systems into a single standard.


In practice, this means that a customer buys a relay or dimmer and scans it into the HomeKit application on their iPhone or the SmartThinks application on their Samsung smart TV, without having to deal with complex mutual integrations. iNELS has 6 tuned out units in its portfolio, which are primarily intended for controlling lights. They are Switch unit, Universal dimmer, Wireless switch, Glass touch controller, Window and door detector and motion detector.

These absolute novelties on the Smart Home market are quickly finding their first users, and ELKO EP, as always, guarantees that these are not toys but a professional Smart Home solution that will serve the customer well for many years.

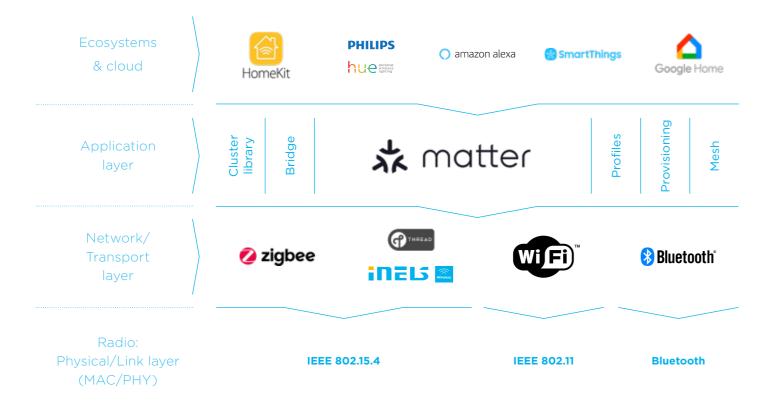



Online Customization

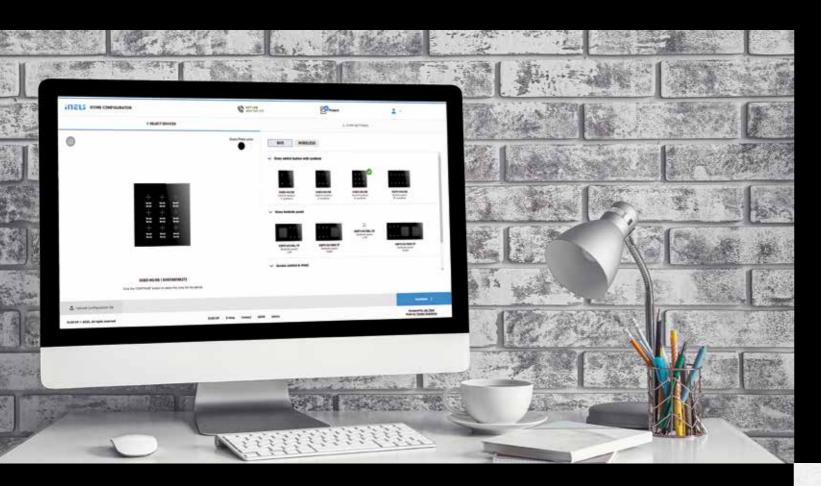


(\mathbf{b})		\otimes	$\left(+\right)$	\bigcirc	×	+		ţ	ON	OFF	\otimes		\sim	
\bigtriangledown	\gg	\approx	<	$\left.\right>$	\triangleleft	\triangleright	~~~	>>>>	5	2 Č Č	-)Ŏ(-	ĊĊ.	ý	Ä
\bigtriangledown	R	₽+	₽_	P	$\mathbb{A}^{\mathbb{A}}$	Â	Ę	Å	Å	000. 000.	<u>;</u>	þ.:	AUTO	
0 0 0	$\widehat{\Box}$	TD	\bigtriangleup	$\int \mathcal{O}$	00 00		\widehat{T}	Ţ	Ĥ	ŢŢ	Ş	Ø		
		Ł				<[]>	> <u>{</u> }<		Ē	H	Ħ			胚
$\boxed{\cdot}$				₽ <1		<u>kiinn</u>	ŢŢ	Ţ		ā	₩ Į	H	A	IB
	(Ter	\sim		<i>₹</i>	Ý	Ş	<u>ු නි</u> රි	\bigcirc	رگی	تى	Ĥ		ا کا	¥{
·	í.	ί£	Ð	(X) X	∑ ²'		رک		٩ ال	- O	Ŀ	(H)		<u>-</u>
°C	Ŋ	°C/F	ő	()''	S	S	Å	A	-)	S-	&=	S€Ξ	٨	- Sp 1
Ø	**	CS	$\langle $		\bigotimes	 ;;;	E.	્ની			<u>@</u>			
\Diamond	\bigcirc		0	((+))	©	(H)		~ ^		\bigcirc		G	8	ĵ
$\overline{\frown}$	<pre>Chancel Control </pre>	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	ر دی ک	Ц×	仁 〉	」))	다)))	\bigcirc	Ś	S.	\boxtimes	ECO	Ŷ	R

ELKO EP as a manufacturer has technologies that allow us to offer you a wide range of customization: colors of controls, shapes of glass, icons and button descriptions, including hotel room numbers and even hotel logos. Special and unusual combinations can be made on request.

We can supply the entire order with elements pre-programmed from the factory so that you only install them according to their codes in the correct room numbers. This will significantly reduce programming and commissioning costs.



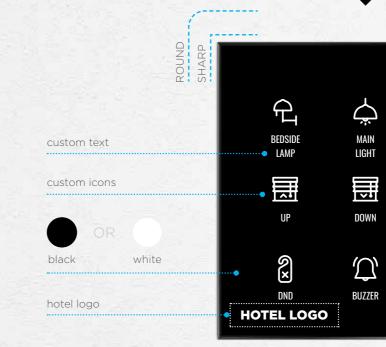



Online customization: icons.inels.com

Select your favourite colour and material.



ON / OFF



variable wall background

Your Gateway to Smart Control

SA3-014M - Switching actuator

Transform into zero crossing

Explore home automation or a professional managing large-scale projects using the CU3-08M, your gateway to intelligent control.

IP/ETH RJ 45 2× iNESL BUS, up to 64 devices,

0

TUN . 105.485 . BU51

> . RESE

Mar

inels

ETH

- remote control, iNELS cloud app,
- MQTT, 3rd party integration

Cloud Connectivity

Directly communicate with the iNELS cloud through Ethernet connector. Enjoy mobile app control and iNELS cloud feature within the IP topology.

MQTT Protocol Integration

Seamlessly communicate with third-party devices through the implemented MQTT protocol, opening up possibilities for comprehensive control and automation.

 $\square \square$

IoT Integration



Leverage the power of IoT with MQTT connectivity, enabling monitoring and control, integration for an array of IoT devices.

Enhance your electrical setup with the SA3-014M Switching Actuator, ensuring unmatched precision and control.

Transform your electrical systems with cutting-edge zero-crossing technology! Trust the SA3-014M for steadfast and dependable performance in challenging situations.

Attain precision in your electrical processes through zero-crossing synchronization. Perfect for a variety of applications, including lighting, appliances, shutters/ blinds, and more.







(ئ



Create a smart home ecosystem where the CU3-08M

Commercial Projects

Home Automation

Scale up your projects effortlessly by integrating multiple CU3-08M units, offering centralized control for diverse applications.

Dual BUS Connectivity

Connect up to 64 elements (2x32) effortlessly, expanding your iNELS BUS portfolio with flexibility and ease.



lore details about CU3-08M





Zero Crossing Technology

Enjoy synchronized relay operation at the zero voltage point of the sinusoidal waveform.

14 Independent Relays

Each with NO potentialless contacts, switching the same potential with a maximal loadability of 10A.

Individual Control

Customize your outputs effortlessly with individual control of the fourteen contacts.

JA3-014M Shutter Actuator

The Best option for controlling shutters and curtains.





 \sim



Č....



GSB3 - Glass switch buttons

Touch the Future

Empower each button to command any appliance in your system. Assign unique functions or macros to create a personalized smart home environment. One button, multiple appliances - it's that simple!





Illuminate your space with the elegant glow of RGB LED lights on individual buttons. Create ambiance and functionality in one sleek design.

Versatile Functionality

Embedded with an integrated temperature and Humidity Sensor. 1x analog and digital inputs to connect external devices.

Easy Installation

Designed for mounting into a standard installation box.

10

4 buttons / sharp



GSB3-40W

6 & 9 buttons / sharp



GSB3-60B

4 buttons / rounded



GSB3-240B

6 buttons / rounded



GSB3-260B

Ģ

9 buttons / rounded



GSB3-290W





GSB3-90W


GSB3-240W



GSB3-290B

GSS3 & MSS3 - Socket panels



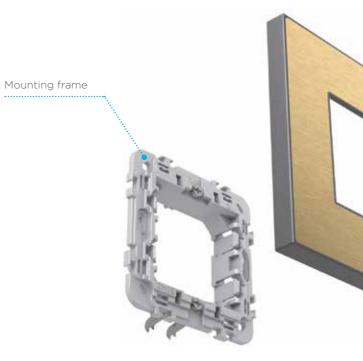

Socket panels are an essential part of every hotel room's controls. They replicate the designs of the glass GSB and metal MSB controllers. Various device modules can be inserted into the frames: 110/230V multistandart socket, USB A+C, HDMI, LAN, PIR and others. You can thus create combinations to suit your wishes, whether for your bed, TV or desk. For the design variants, the PMS multistandard socket in matt black is used. These devices are available in polar white and matt black. The hole in the GSS3/MSS3 can be filled with a 2Module accessory or 2× 1Module. A 1Module blind cover is available.

MSF3-PMS/G

Glass plates finishes





W - White glass

GSF3-PMS/B GSF3-PMS/W



MSF3-PMS/B

Metal plates finishes




MSF3-PMS/C

B - Graphite black C - Antique copper G - Satin brass



MSF3-PMS/S S - Brushed silver

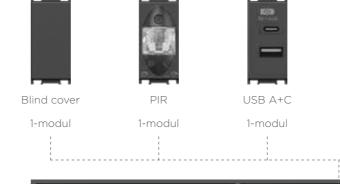




USB-A+C sockets & LAN RJ45

AC power multistandard socket PMS



B – Black glass

More details about **MSS3**

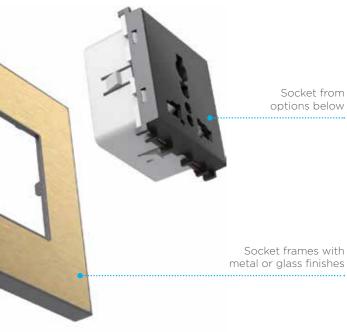



Metal switch buttons with indicators

metal come

together

When glass and

MSB3 – Metal switch buttons

BUS

Luxury without compromise

As a compromise between GSB3 (glass) and MSB3 (metal), we present the ZSB3 collection, which is set in a frame that, like MSB3, corresponds to the GSS3 sockets panels.

They are available in a black variant, black glass with graphite buttons, or a white variant, white glass and white plastic buttons. Always in a 4, 6 or 9 button configuration, with adjustable backlighting around the edge.

The new range of metal control panels combines the luxury of metal surfaces with the elegance of a classic button press. Four finishes are available for both panels and buttons: Brushed Silver, Satin Brass, Antique Copper or Graphite Black.





ZSB3-40/B Black Glass





ZSB3-90/W White Glass



ZSB3-90/B Black Glass

Even on the glass one can freely label texts or symbols.

ZSB3-60/B

Black Glass





Brushed Silver 4 buttons







The white backlighting of the buttons, whose function and brightness can be defined by software, adds an even higher level of comfort to the chosen design. The panels can be freely customized with icons and text see icons.inels.com configurator.


Satin Brass 6 buttons



White Sharp 9 buttons



Experience microwave technology



Step into the future of motion detection – Upgrade to the **MCD3-01** Ultra Slim Microwave Motion Detector. Elevate your space with cutting-edge technology, seamless integration, and unparalleled precision.

Ultra-Slim Design

Seamlessly integrates into any environment with its compact and slim profile, offering versatile ceiling or surface mounting options.

Adjustable Reach

Customize your detection range from 2 to 10 meters in radius, providing flexibility for various applications.

>10 m

\$\$)

Smart Integration

Seamlessly combine with other iNELS units using iDM3 software for enhanced automation and customized control scenarios.



More details about MCD3-01

Effortless Installation

With dimensions of 115×24 mm, the MCD3-01 is designed for easy integration into different ceiling or surface mounting applications.

Versatility in Applications

Ideal for a range of environments, from homes to commercial spaces, ensuring security and automation tailored to your needs.

Microwave Technology

Experience unparalleled precision with a 5.8 GHz continuous wave radar system in the ISM band.

360° Detection Angle

Enjoy comprehensive coverage with a wide-angle lens, ensuring no motion escapes the MCD3-O1's watchful eye. PMS3-01 - Ultra slim PIR motion detector

Experience the future of **Motion Detection**



BUS

78

<u>(</u>)

360,

\$

Are you looking for a smart and reliable way to control the lighting in your home or office? Do you want to save energy and money while enhancing the comfort and security of your space? If so, you need the **PMS3-01**, the ultra-slim PIR motion detector from ELKO EP.

Integration and Automation

- seamlessly integrates with iNELS units using iDM3 software
- enables automation and customization for tailored control
- scenariosenhances energy efficiency and control

Application

- ensure the safety of your home with intelligent motion detection
 enhance security and energy efficiency in offices and retail spaces
- reliable performance in challenging industrial environments
 optimal for public spaces like libraries, museums, and com-
- munity centers
 improve guest experience by automating lighting and climate control







Ultra-Slim Design

- seamlessly integrates into any environment
- aesthetically pleasing for a modern look

360° Detection

comprehensive coverage for enhanced security
 precise and reliable motion detection using infrared technology

Adjustable Time Settings

- customizable activation duration to suit specific project requirements
- enhances energy efficiency and control

Wide Detection Range

- up to 6 meters range for versatile applications
- install at different heights (2.5m-3.5m) for flexibility





"R



New iNELS cloud & iNLES App

One of the standout features of iNELS Cloud is its ability to empower users to remotely control their blic IP address. This eliminates the hurdles associated with accessing installations remotely, providing convenience and accessibility to users of smart homes and larger automated setups..

The outsourcing of data to the cloud not only ensures enhanced stability but also opens the doors to a broader range of third-party device integration and interconnection. This advancement promises a more enjoyable user experience, allowing seamless integration with popular voice control platforms like Google Home and Amazon Alexa, offering users greater flexibility and control.


In a move set to redefine hospitality automation, iNELS Cloud introduces the HRS (Hotel Reception Software) console. This cutting-edge console enables real-time monitoring of room status, including occupancy, MUR/DND, and grants control over vital functions such as temperature, lighting, and welcome scenes. The HRS software can be deployed on a dedicated hotel server or accessed through a Cloud version online, providing hotels with unprecedented flexibility in implementing smart technologies.

Complementing the HRS console is a dedicated smartphone app designed for housekeeping. This app furnishes housekeeping staff with crucial information on room occupancy and cleaning requests, streamlining operations and enhancing overall efficiency.

iNELS Cloud is set to elevate the way users interact with their connected environments, bringing about a new era of smart living.





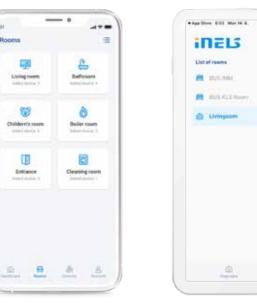

Rooms



Dashboard

Device overview with the option to view event history.


<i>N</i>	1. and	11	11	N
1111) 8 8 1	0)
-	OFF		30.49	
(M)	Inder 118	N.	BYGA THE BUE	11
an 18 (6)	P)
**	*•	\$ 2	O D D D D D D D D D D D D D D D D D D D	0.2
www. W	-		BOLINGS	

Rooms management

Settings according to individual rooms.

+ Livingoom	### `C	f 🕈 het Diege					
@ .=	& >	28.6*					
DEL.	fus	hca 1	hce 2				
C Brahmann Pro-		Bloom	- Bitme				
27.0	28.6*	27.0*	* 💿				
Rea 3	hoa 4	hca S	motion				
Press.	# North		Serger Materia				
28.6*	Q	°28 >	@ @				
rtti 20	RGB	net.	102				
	81920mm, 10(%)		1910				
@	@ 0	(b) iii	0				
543	444	545	846				
2010/01/1	1,004100	1041 H 10	1000				
	di-		B				

All what you need for your **SMART home, office, building...**

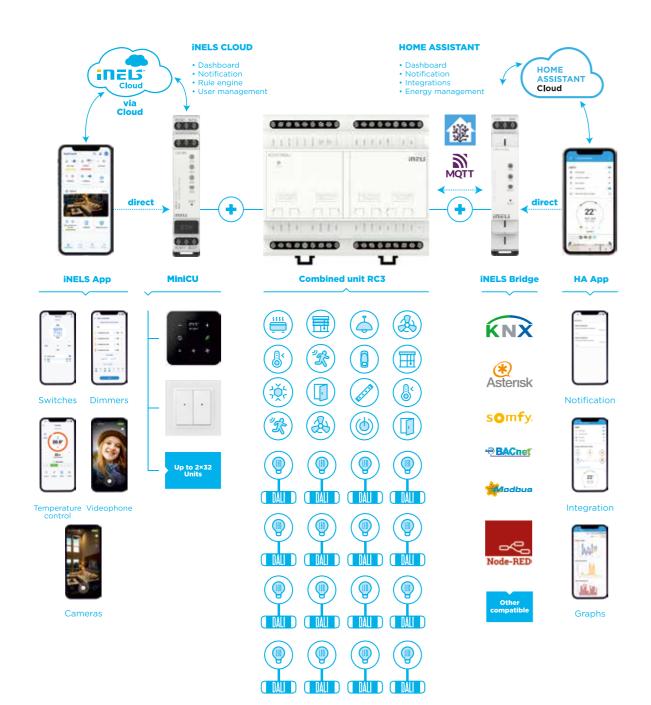

iNELS & 3rd part solution

Unlimited control options




The iNELS gateways, both in wired (CU3-08/09/10M) and wireless (eLAN-RF-103) versions, have implemented bidirectional MQTT communication. In practice, this means that real-time data from all iNELS system components are sent to the MQTT Broker (iNELS Bridge). Additionally, thanks to the bidirectional communication, these components can be freely controlled.


This approach makes the iNELS system open for easy integration into superior BMS (Building Management Systems) and PMS (Property Management Systems). It can be easily connected to third-party systems and implemented into various applications.





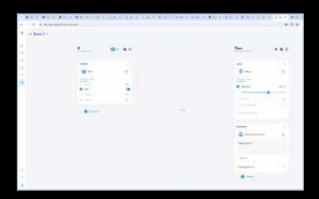



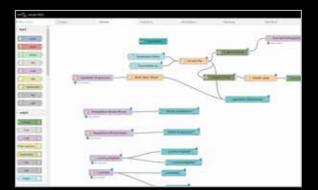

Multifunction digital time switch **with Wi-Fi**

Multifunction monitoring voltage relay for AC/DC

It can be used to control various electrical devices according to different programs (daily, weekly, yearly, and astronomical). It has a universal supply voltage range of AC/DC 24 - 240 V and a user-replaceable battery for backup.

It has one changeover output with a maximum current of 16 A. This product is suitable for various applications such as lighting, heating, ventilation, irrigation, pumps, and more. You can easily set up and control this product using the ELKO Smart app on your smartphone or tablet.

prine .						Manual control *					
 les.			10			A constant			12.000		
14.00			100			-		0			
10,010-00			Trees Area		0.000 V		-				
1000			10				22		ALC: NO	100	
		Property	Summy *	-		-			chedde"		
traper.	140	-		-	-	- Property	140	-	-	-	-
-	-	- 10	- a kopi	-	-		-	1.60	114.000	-	
	140			-11-16			14			-	100
	-		-	10.8	100		ana's				-
	inter a		-	100	-	1	-	1.00	-11440	-	-
-	100		- 440	-10.0	1.00		- 14		manie		-



- NTP time synchronization
- NEW display with white backlit
- connection to network
- repeat for time programs
- PIN code, backup, astro interupt, and more

1115



It is used to monitor the value of alternating or direct voltage in 1-phase circuits. It has a supply voltage from the monitored voltage.

It monitors voltage exceeding the upper voltage level (Umax) and falling below the lower voltage level (Umin) - according to the selected function. It has a smooth adjustment of both voltage levels – the lower level Umin is set in % of the upper level Umax. It has an adjustable time delay (to eliminate short-term voltage drops and spikes). It has the option of choosing functions with memory of the error state (Latch).

The memory of the error state can be reset by the control input (R). It measures the true effective value of the voltage - TRUE RMS. It has one changeover output with a maximum current of 16 A.






Features

- supply from monitored voltage
- adjustable hysteresis
- possibility of latch functions
- reset control input
- more ranges: AC/DC 24-150V,

AC/DC 48-276V, DC 6-30V

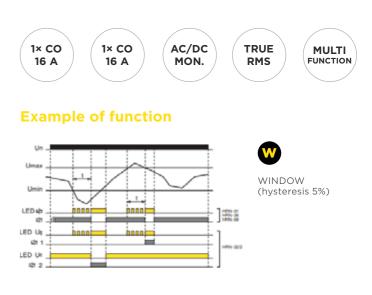

Multifunction current monitoring relay for AC



It is used to monitor the value of alternating current in 1-phase circuits. It has a supply voltage from the monitored voltage.

It monitors current exceeding the upper level (Imax) and falling below the lower level (Imin) - according to the selected function. It has a smooth adjustment of both current levels - the lower level Imin is set in % of the upper level Imax. It has an adjustable time delay (to eliminate short-term current spikes and drops). It has the option of choosing functions with memory of the error state (Latch). The memory of the error state can be reset by the control input (R).

It measures the true effective value of the current - TRUE RMS. It has one changeover output with a maximum current of 16 A. It has a 1-module housing and dimensions of 90 x 17.6 x 64 mm.



lore details about **PRI-34**


- without galvanic isolation
- can be used with current transformer

1× CO 1-16 A AC/DC TRUE RANGE UNI RMS 16 A

MULTI

FUNCTION

Example of function



disconnection



It can be used to delay the switching off of a backup power supply and systems in case of power failure. It has four functions that can be selected by a rotary switch.

It has two changeover outputs with a maximum current of 8 A. It has a 1-module housing and dimensions of 90 x 17.6 x 64 mm. Holds contact for the set time even during power failure.




Another variable types

- star-delta timer
- single function relays
- energy-saving time relay
- emergency light tester



Example of function

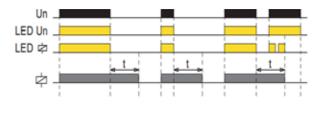



iNELS for everything & everywhere



Magyar State Opera

Budapest, Hungary

- every additional lighting source is also controlled by iNELS system. The devices here are controlled by RF Touch
- for switching the RFSA-11B and RFSA-66M is used



Sunseeker yacht

Mallorca, Spain


- data processing and weather station information
- controling of the air temperature in the boat and outdoors (sea, etc.) entry security
- lighting control



Moni's Jewelry

Budapest, Hungary

• jewelry shop in the heart of Budapest

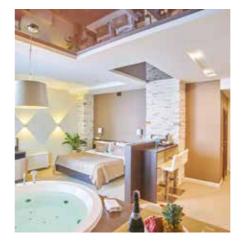

SPA hotel NEMO

Ukraine/Odessa

- · luxury anf confort thanks to smart technology iNELS BUS
- the air conditioning, lights and the fire system in hundred hotels rooms it is the project scope
- the basic element is the control of Mitsubishi HVAC with a support of hotel thermostats GRT3 and iNELS glass touch controllers



Mashroat Office

Saudi Arabia/Riyad

- the headquarters of goverment company Mashroat Office - The National Project Management, Operation and Maintenance Organization
- The lighting control of the conference facilities and coridors divaded into 8 rooms and 32 dimmable circuits



Riyadh Metro

Saudi Arabia, Riyad

- protection for tunnel ventilation fan
- in underground stations • TER-7 - thermostat for monitoring temperature of motor winding
- 188 pieces in 12 metro stations

11

Ferrari Showroom

Ferrari Showroom, Dubai, UAE

- lighting control in cooperation with Preciosa Lighting



New Living Center

Prague, Czech Republic

- New Living Center is a place for atrchitects, designers, developers, but also for every design lover
- the whole concept is conceived as a stan-
- dard living space with smart control exhibition of design frames LOGUS⁹⁰



Hyundai

lighting

via app

Kuwait Society of Engineer

Kuwait, Bneid Al Qar

- KSE is one of the leading institutes in Kuwait where it holds more than 5 thousand engineers serving various government and private sectors
- iNELS has installed a combination of BUS & RF solutions to control lighting, blinds, and shutters
- KSE is one of the strategic supporters of iNELS and working together on other technological projects



iNELS References | inels.com/references



- unique jewelry & Forever Mark diamonds



iNELS Café

Prague, Czech Republic

- fusion of smarthome showroom
- from each table it is possible to control some features and setup the site via an iPad
- 4 tables with 32" full screen touch glass with special app
- individual 15 m² iNELS showroom





Nošovice, Czech Republic

• 736 pcs LED High Bay within retrofitted

• central control DALI ballast via EDMC • control of each zone from the touch panel

Movenpick Hotel

JLT, United Arab Emirates

- Client: IFA Hotels and Resortd
- Contractor: Drake and Scull, Dubai, UAE
- Consultant: Al gurg Consultants, Dubai, UAE
- System: GRMS + Lighting
- Control System
- Total Floors: 40
- Total Room: 400



Headquarters

ELKO EP Holding SE, Czech Republic

Europe

ELKO EP Balkan d.o.o ELKO EP Bulgaria OOD ELKO EP Germany GmbH ELKO EP Hungary Kft. ELKO EP POLAND Sp. z o.o. ELKO EP SLOVAKIA, s.r.o. ELKO EP UK Ltd. ELKO EP UKRAINE LLC

• Africa & Middle East

ELKO EP Egypt LLC ELKO EP Kuwait Ltd. ELKO EP MEA LLC ELKO EP Saudi Arabia Ltd.

America

ELKO EP North America LLC



ELKO EP, S.r.o. | Palackeho 493 | 769 01 Holesov, Vsetuly | Czech Republic phone: +420 573 514 221 | fax: +420 573 514 227 | elko@elkoep.com | www.elkoep.com